


SMALLEY® SPIRAL RETAINING RINGS

**Acciaio al Carbonio per Molle
SAE 1070-90**

surface treatment:
Oliatura

Esempio di designazione: WST-46

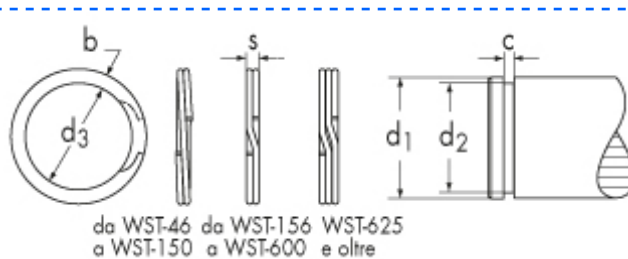

d1=diametro albero
d2=diametro gola
d3=diametro interno anello
S=spessore

Medium-heavy
duty series
**WST - per
alberi
(in pollici)**



description	Price Euro x100	% Price Change		Package
		1	2	
WST-306	240,00	+ 20%	-	100

DESCRIPTION	GROOVE	THRUST CAPACITY
WST-306	d2 inch. 2.920 mm 74.17	ring shear Newtons 159.194 L.B.S. 35,790
d1 mm 77.77	Toll. d2 inch. +/-0,006 mm +/-0,15	(safety factor =3)
d1 inch 3.062	c inch. 0.103 mm 2.62	groove yield Newtons 68.366 L.B.S. 15,370
RING IN THE UNSTRESSED STATE		(based on a groove material yield strength of 310/mm and a safety factor of 2)
d3 inch. 2.897 mm 73.58	Toll. c inch. +0,005 mm +0,130	
Toll. d3 inch. -0,03 mm -0,76		
b inch. 0.188 mm 4.78		
Toll. b inch. +/-0,005 mm +/-0,13		
s inch. 0.093 mm 2.36		
Toll. s inch. +/-0,003 mm +/-0,08		
Weight Kg/1000 20.50		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350