


SMALLEY® SPIRAL RETAINING RINGS

Acciaio al Carbonio per Molle
SAE 1070-90

surface treatment:
Oliatura

Esempio di designazione: HH-37

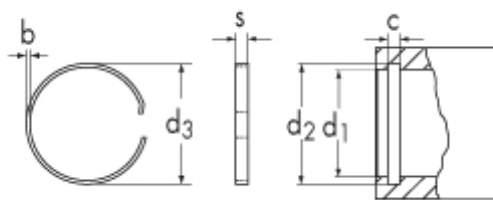

d1=diametro foro
d2=diametro gola
d3=diametro interno anello
S=spessore

HH - per fori
(in pollici)



description	Price Euro x100	% Price Change		Package
		1	2	
HH-262	280,00	+ 20%	-	50

DESCRIPTION	GROOVE	THRUST CAPACITY
HH-262	d2 inch. 2.670 mm 67.82	groove yield Newtons 18.570 L.B.S. 4,175
d1 mm 66.68	Toll. d2 inch. +/-0,006 mm +/- 0,15	(based on a groove material yield strength of 310/mm and a safety factor of 2)
d1 inch 2.625	c inch. 0.232 mm 5.89	
RING IN THE UNSTRESSED STATE	Toll. c inch. +0,005 mm +0,130	
d3 inch. 2.723 mm 69.16		
Toll. d3 inch. +0,030 mm +0,76		
b inch. 0.045 mm 1.14		
Toll. b inch. +/-0,002 mm +/-0,05		
s inch. 0.225 mm 5.72		
Toll. s inch. +/-0,005 mm +/-0,13		
Weight Kg/1000 11.00		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350