


SMALLEY® SPIRAL RETAINING RINGS

SAE 1070-90 Carbon Steel

surface treatment:
Oil dipped

Example of designation: WHM-25

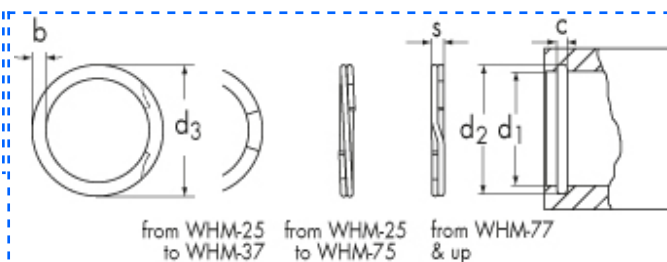

Heavy duty series
WHM - for bores
(in inches)



d1=shaft diameter
d2=groove diameter
d3=external ring diameter
s=thickness

description	Price Euro x100	% Price Change		Package
		1	2	
WHM-268	190,00	+ 20%	-	100

DESCRIPTION	GROOVE	THRUST CAPACITY
WHM-268	d2 inch. 2.848 mm 72.34	ring shear Newtons 139.712 L.B.S. 31,410
d1 mm 68.28	Toll. d2 inch. +/-0,006 mm +/-0,15	(safety factor =3)
d1 inch 2.688	c inch. 0.103 mm 2.62	groove yield Newtons 67.610 L.B.S. 15,200
RING IN THE UNSTRESSED STATE		(based on a groove material yield strength of 310/mm and a safety factor of 2)
d3 inch. 2.868 mm 72.85	Toll. c inch. +0,005 mm +0,130	
Toll. d3 inch. +0,030 mm +0,76		
b inch. 0.225 mm 5.72		
Toll. b inch. +0,004/-0,006 mm +0,10/-0,15		
s inch. 0.093 mm 2.36		
Toll. s inch. +/-0,003 mm +/-0,08		
Weight Kg/1000 21.98		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350