


SMALLEY® SPIRAL RETAINING RINGS

Stainless steel
AISI 316

surface treatment:
Steam degreasing
Ultrasonic cleaning

Example of designation:
VHM-6-S16

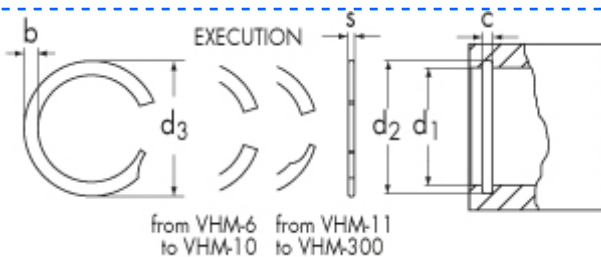

Light duty series
VHM - for bores



d1=shaft diameter
d2=groove diameter
d3=external ring diameter
S=thickness

description	Price	% Price Change		Package
	Euro x100	1	2	
VHM-280-S16	7.100,00	+ 20%	-	25

DESCRIPTION	GROOVE	THRUST CAPACITY
VHM-280-S16	d2	ring shear Newtons 468.214 (safety factor =3)
d1 mm 280.00	Toll. d2	groove yield Newtons 477.614 (based on a groove material yield strength of 310/mm and a safety factor of 2)
RING IN THE UNSTRESSED STATE		
d3	c	
mm 289.87	mm +/-0,20	
Toll. d3	Toll. c	
mm +10,78	mm 2.08	
b		
mm 9.65		
Toll. b		
mm +/-0,15		
s		
mm 1.93		
Toll. s		
mm +/-0,05		
Weight Kg/1000		
128.57		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution of fasteners, fixing elements and mechanical parts machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350