


SMALLEY® SPIRAL RETAINING RINGS

SAE 1060-75 Carbon Steel

surface treatment:
Oil dipped

Example of designation: FSE-0050

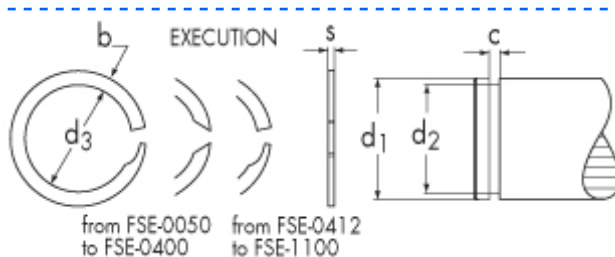

d1=shaft diameter
d2=groove diameter
d3=internal ring diameter
S=thickness

Heavy duty
series
FSE - for shafts
(in inches)



description	Price Euro x100	% Price Change		Package
		1	2	
FSE-0056	32,00	+ 20%	-	1000

DESCRIPTION	GROOVE	THRUST CAPACITY
FSE-0056	d2	ring shear
d1 mm 14.27	inch. 0.532	Newton's 11.623
d1 inch 0.562	mm 13.51	L.B.S. 2,613
	Toll. d2	(safety factor =3)
	inch. -0,004	
	mm -0,100	
	c	groove yield
	inch. 0.043	Newton's 2.651
	mm 1.09	L.B.S. 596
	Toll. c	(based on a groove material yield strength of 310/mm and a safety factor of 2)
	inch. +0,006	
	mm +0,150	
RING IN THE UNSTRESSED STATE		
d3	inch. 0.524	
	mm 13.31	
Toll. d3	inch. -0,013	
	mm -0,33	
b	inch. 0.055	
	mm 1.40	
Toll. b	inch. +0,003/-0,005	
	mm +0,08/-0,13	
s	inch. 0.037	
	mm 0.94	
Toll. s	inch. +/-0,002	
	mm +/-0,05	
Weight Kg/1000	0.42	

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350