


SMALLEY® SPIRAL RETAINING RINGS

Acciaio inox
AISI 302

surface treatment:
Sgrassaggio al vapore
Pulizia ad ultrasuoni

Esempio di designazione:
WSM-25-S02

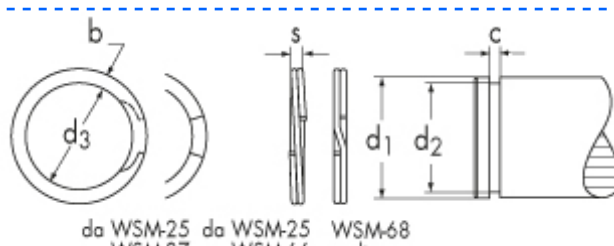

Heavy duty
series
WSM - per alberi
(in pollici)



d1=diametro albero
d2=diametro gola
d3=diametro interno anello
S=spessore

description	Price Euro x100	% Price Change		Package
WSM-650-S02	10.300,00	1 + 20%	2 -	25

DESCRIPTION	GROOVE	THRUST CAPACITY
WSM-650-S02	d2 inch. 6.225 mm 158.12	ring shear Newtons 566.764 L.B.S. 127,420
d1 mm 165.10	Toll. d2 inch. +/-0,008 mm +/-0,2	(safety factor =3)
d1 inch 6.500	c inch. 0.174 mm 4.42	groove yield Newtons 282.048 L.B.S. 63,410
RING IN THE UNSTRESSED STATE	Toll. c inch. +0,008 mm +0,200	(based on a groove material yield strength of 310/mm and a safety factor of 2)
d3 inch. 6.181 mm 157.00		
Toll. d3 inch. -0,06 mm -1,52		
b inch. 0.418 mm 10.62		
Toll. b inch. +0,004/-0,008 mm +0,10/-0,15		
s inch. 0.156 mm 3.96		
Toll. s inch. +/-0,005 mm +/-0,13		
Weight Kg/1000 165.97		

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL
viale Pier Paolo Pasolini, 83
Sesto San Giovanni Mi - Italy

Sales department
250@gandini.it
tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350