

Metallic screws and nuts


- 1) È consentito un lieve arrotondamento o svasatura all'imbocco.
- 2) Il bordo superiore della testa può essere arrotondato o smussato, come indicato a discrezione del produttore.
- 3) Il bordo inferiore della testa può essere arrotondato o smussato a dw, ma in ogni caso sarà privo di bave.

$$l_g \max = l - b$$

$$l_s \min = l_g \max - 5p$$

$$l_f \max = 1,7 r \max$$

$$r \max = d_a \max - d_s \max: 2$$

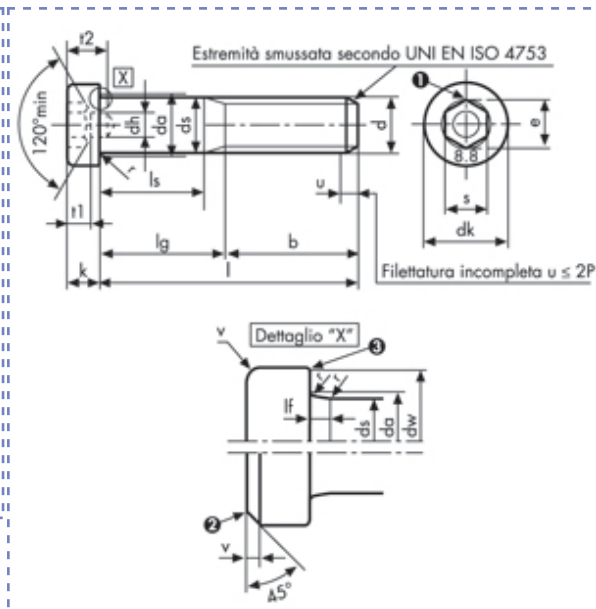

Hexagonal socket head cap screws
con esagono incassato e foro guida
DIN 6912 Classe 8.8



Description	Price VATexcl. euro/100	% Price Change		Package	d mm	L mm
		1	2			
M 8 X 50	on demand	-	-	-	M8	50

M850-691288		dh	max	4.075	r	min	0.4
p	1.25		min	4		nom	6
b	I ≤ 125	ds	max	8	s	max	6.14
	125 < I ≤ 200		min	7.78		min	6.02
	I > 200	dw	min	12.03		nom	3
dk	max	e	min	6.86	t1	max	3.12
	min	lf	max	1.02		min	2.88
da	max	k	max	5	t2	max	6.86
			min	4.82		min	6.5

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL Sales department
viale Pier Paolo Pasolini, 83 250@gandini.it
Sesto San Giovanni Mi - Italy tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350