

## Metallic screws and nuts


- 1) A light rounding-off or a countersink between the head and the hexagon socket is allowed.
- 2) The superior side of the head can be rounded or blunt as per manufacturer directives.
- 3) The inferior side of the head can be rounded or blunt to  $d_w$ , in both cases it will be without rags.

$$l_g \max = l - b$$

$$l_s \min = l_g \max - 5p$$

$$l_f \max = 1,7 r \max$$

$$r \max = d_a \max - d_s \max: 2$$

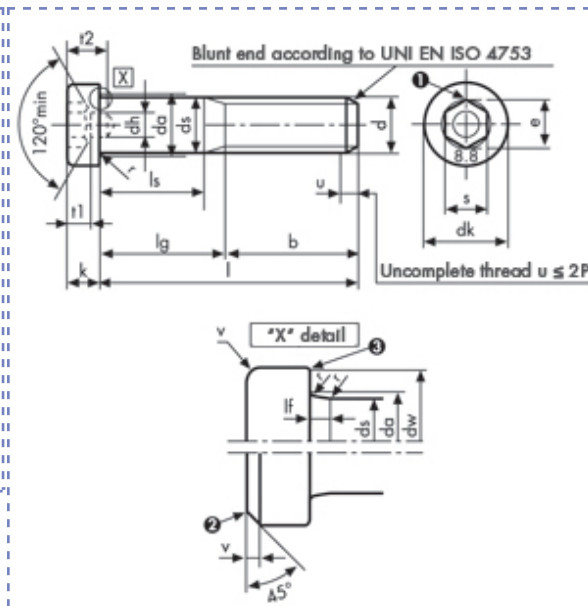

Hexagonal socket head  
cap screws  
low head with easier hole  
DIN 6912 Class 8.8



| Description | Price VATexcl.<br>euro/100 | % Price Change | Package | d mm | L mm |
|-------------|----------------------------|----------------|---------|------|------|
| M 12 X 70   | on demand                  | 1<br>2         | -       | M12  | 70   |

|                     |                    |       |       |     |        |     |
|---------------------|--------------------|-------|-------|-----|--------|-----|
| <b>M1270-691288</b> | dh                 | max   | 6.075 | r   | min    | 0.6 |
| p                   | 1.75               | min   | 6     | nom | 10     |     |
| b                   | $l \leq 125$       | 30    | ds    | max | 10.175 |     |
|                     | $125 < l \leq 200$ | 36    |       | min | 10.025 |     |
|                     | $l > 200$          | -     | dw    | min | 17.03  |     |
| dk                  | max                | 18    | e     | min | 11.43  | t1  |
|                     | min                | 17.73 | lf    | max | 1.45   | max |
| da                  | max                | 13.7  | k     | min | 7.5    | min |
|                     |                    |       |       |     | 7.28   |     |
|                     |                    |       |       |     |        | t2  |
|                     |                    |       |       |     |        | max |
|                     |                    |       |       |     |        | min |
|                     |                    |       |       |     |        | 9   |

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

**GANDINI FASTENERS SRL** viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy  
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution  
of fasteners, fixing elements  
and mechanical parts  
machining

**GANDINI FASTENERS SRL** Sales department  
viale Pier Paolo Pasolini, 83 250@gandini.it  
Sesto San Giovanni Mi - Italy tel +39 02 241 047 250

**Administration**  
350@gandini.it  
tel +39 02 241 047 350