

# Metallic screws and nuts

Confezionati nella stessa scatola



Bolts, nuts and double washer  
**UNI - EN 14399-4 / 14399-6**  
**Class K1 Zinc plated**



| Description                       | Price VATexcl.<br>euro/100 | % Price Change |   | Package | d mm | L mm |
|-----------------------------------|----------------------------|----------------|---|---------|------|------|
|                                   |                            | 1              | 2 |         |      |      |
| <b>M 30 X 150 ZINCATE A CALDO</b> | <b>on demand</b>           | -              | - | 1       | M30  | 150  |




|                                           |     |
|-------------------------------------------|-----|
| <b>M 30 X 150<br/>ZINCATE A<br/>CALDO</b> |     |
| <b>p</b>                                  | 3.5 |
| <b>b</b>                                  | 44  |
| <b>c</b> max                              | 0.8 |
| min                                       | 0.4 |

|               |       |
|---------------|-------|
| <b>da</b> max | 35    |
| nom           | 30    |
| <b>ds</b> max | 30.84 |
| min           | 29.16 |
| <b>dw</b> min | 46.6  |
| <b>e</b> min  | 55.37 |


|               |       |
|---------------|-------|
| nom           | 19    |
| <b>k</b> max  | 20.05 |
| min           | 17.95 |
| <b>kw</b> min | 12.56 |
| <b>r</b> min  | 2     |
| <b>s</b> max  | 50    |
| min           | 49    |

| l - mm |        |        | M30    |        |
|--------|--------|--------|--------|--------|
| nom    | min    | max    | ls min | lg max |
| 35     | 33,75  | 36,25  |        |        |
| 40     | 38,75  | 41,25  |        |        |
| 45     | 43,75  | 46,25  |        |        |
| 50     | 48,75  | 51,25  |        |        |
| 55     | 53,5   | 56,5   |        |        |
| 60     | 58,5   | 61,5   |        |        |
| 65     | 63,5   | 66,5   |        |        |
| 70     | 68,5   | 71,5   |        |        |
| 75     | 73,5   | 76,5   | 20,5   | 31     |
| 80     | 78,5   | 81,5   | 25,5   | 36     |
| 85     | 83,25  | 86,75  | 30,5   | 41     |
| 90     | 88,25  | 91,75  | 35,5   | 47     |
| 95     | 93,25  | 96,75  | 40,5   | 51     |
| 100    | 98,25  | 101,75 | 45,5   | 56     |
| 105    | 103,25 | 106,75 | 50,5   | 61     |
| 110    | 108,25 | 111,75 | 55,5   | 66     |
| 115    | 113,25 | 116,75 | 60,5   | 71     |
| 120    | 118,25 | 121,75 | 65,5   | 76     |
| 125    | 123    | 127    | 70,5   | 81     |
| 130    | 128    | 132    | 75,5   | 86     |
| 135    | 133    | 137    | 80,5   | 91     |
| 140    | 138    | 142    | 85,5   | 96     |
| 145    | 143    | 147    | 90,5   | 101    |
| 150    | 148    | 152    | 95,5   | 106    |

|     |       |       |       |     |
|-----|-------|-------|-------|-----|
| 155 | 153   | 159   | 100,5 | 111 |
| 160 | 158   | 164   | 105,5 | 116 |
| 165 | 163   | 169   | 110,5 | 121 |
| 170 | 168   | 174   | 115,5 | 126 |
| 175 | 173   | 179   | 120,5 | 131 |
| 180 | 178   | 184   | 125,5 | 136 |
| 185 | 182,7 | 189,6 | 130,5 | 141 |
| 190 | 187,7 | 194,6 | 135,5 | 146 |
| 195 | 192,7 | 199,6 | 140,5 | 151 |
| 200 | 197,7 | 204,6 | 147,5 | 156 |

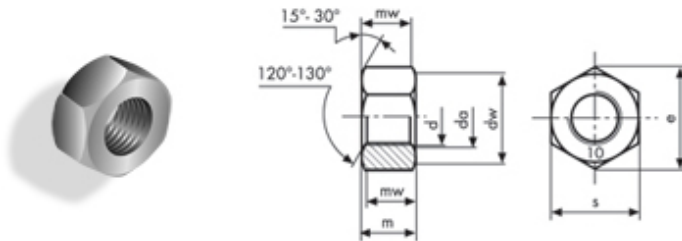

|                                   |            |      |  |           |                  |       |           |            |       |
|-----------------------------------|------------|------|--|-----------|------------------|-------|-----------|------------|-------|
| <b>M 30 X 150 ZINCATE A CALDO</b> |            |      |  | <b>dw</b> | <b>min</b>       | 46.6  | <b>mw</b> | <b>min</b> | 18.16 |
| <b>p</b>                          |            | 3.5  |  | <b>e</b>  | <b>min</b>       | 55.37 | <b>s</b>  | <b>max</b> | 50    |
| <b>da</b>                         | <b>max</b> | 32.4 |  | <b>m</b>  | <b>nom = max</b> | 24    |           | <b>min</b> | 49    |
|                                   | <b>min</b> | 30   |  |           | <b>min</b>       | 22.7  |           |            |       |

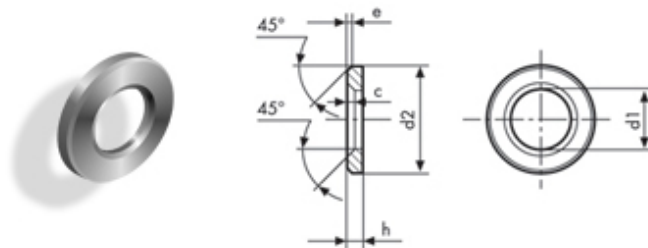

|                                   |            |       |  |
|-----------------------------------|------------|-------|--|
| <b>M 30 X 150 ZINCATE A CALDO</b> |            |       |  |
| <b>d1</b>                         | <b>max</b> | 31.62 |  |
|                                   | <b>min</b> | 31    |  |
| <b>d2</b>                         | <b>max</b> | 56    |  |
|                                   | <b>min</b> | 54.8  |  |

|              |     |
|--------------|-----|
| <b>nom</b>   | 5   |
| <b>h max</b> | 5.6 |
| <b>min</b>   | 4.4 |
| <b>e max</b> | 2   |
| <b>nom</b>   |     |
| <b>=</b>     | 1   |
| <b>min</b>   |     |

|              |     |
|--------------|-----|
| <b>c max</b> | 3   |
| <b>min</b>   | 2.5 |

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

**GANDINI FASTENERS SRL** viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy  
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution  
of fasteners, fixing elements  
and mechanical parts  
machining

**GANDINI FASTENERS SRL**  
viale Pier Paolo Pasolini, 83  
Sesto San Giovanni Mi - Italy

**Sales department**  
250@gandini.it  
tel +39 02 241 047 250

**Administration**  
350@gandini.it  
tel +39 02 241 047 350