

## Metallic screws and nuts

1) A light rounding-off or a countersink between the head and the hexagon socket is allowed.

2) The superior side of the head can be rounded or blunt as per manufacturer directives.

3) The inferior side of the head can be rounded or blunt to  $d_w$ , in both cases it will be without rags.

$l_g \text{ max} = l - b$


$l_s \text{ min} = l_g \text{ max} - 5p$

$l_f \text{ max} = 1,7 r \text{ max}$

$r \text{ max} = d_a \text{ max} - d_s \text{ max} : 2$

**On request:** diameters >M24

**On request:** AISI 304 - 316 - 410 - B7 - L7 materials

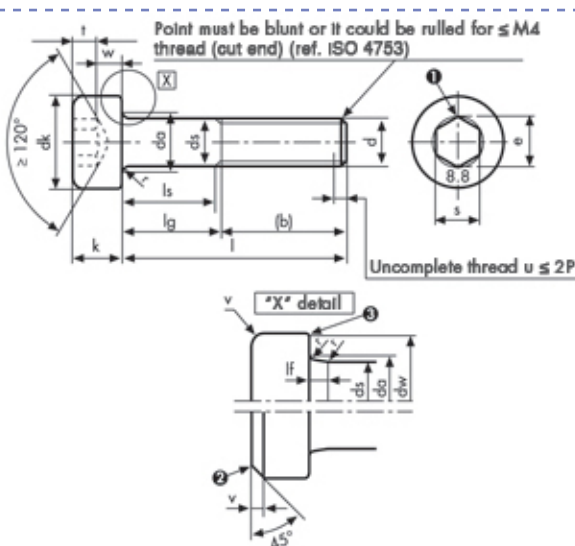

Hexagonal socket head  
cap screws  
**ISO 4762 UNI 5931**  
**DIN 912**  
**Class 8.8 Zinc plated**



| Description             | Price VATexcl.<br>euro/100 | % Price Change<br>1<br>2 | Package | d mm | L mm |
|-------------------------|----------------------------|--------------------------|---------|------|------|
| <b>M 5 X 14 ZINCATE</b> | <b>4,80</b>                | + 60%<br>-               | 1       | M5   | 14   |

|                         |            |            |       |            |            |       |
|-------------------------|------------|------------|-------|------------|------------|-------|
| <b>M 5 X 14 ZINCATE</b> | <b>ds</b>  | <b>max</b> | 5     | <b>s</b>   | <b>nom</b> | 4     |
| <b>p</b>                | <b>min</b> | 4.82       |       | <b>max</b> |            | 4.095 |
| <b>b</b>                | <b>e</b>   | <b>min</b> | 4.583 | <b>min</b> |            | 4.02  |
| <b>dk</b>               | <b>lf</b>  | <b>max</b> | 0.6   | <b>t</b>   | <b>min</b> | 2.5   |
| <b>nom</b>              | <b>k</b>   | <b>max</b> | 5     | <b>v</b>   | <b>max</b> | 0.5   |
| <b>max</b>              | <b>min</b> | 4.82       |       | <b>dw</b>  | <b>min</b> | 8.03  |
| <b>min</b>              | <b>r</b>   | <b>min</b> | 0.2   | <b>w</b>   | <b>min</b> | 1.9   |
| <b>da</b>               | <b>max</b> |            |       |            |            |       |

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

**GANDINI FASTENERS SRL** viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy

Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution  
of fasteners, fixing  
elements  
and mechanical parts  
machining

**GANDINI FASTENERS SRL** Sales department  
viale Pier Paolo Pasolini, 83 250@gandini.it  
Sesto San Giovanni Mi - Italy tel +39 02 241 047 250

**Administration**  
350@gandini.it  
tel +39 02 241 047 350