

Metallic screws and nuts

ISO 4014 foresees s, e, dw values different by UNI and DIN for M10, M12, M14, M22 diameters


Tolerance: A and B category according to stock availability

On request: diameters >M30 - length >300

$lg_{max} = l - b$

$ls_{min} = lg_{max} - 5p$

On request: AISI 304 - 316 - 410 - B7 - L7 materials

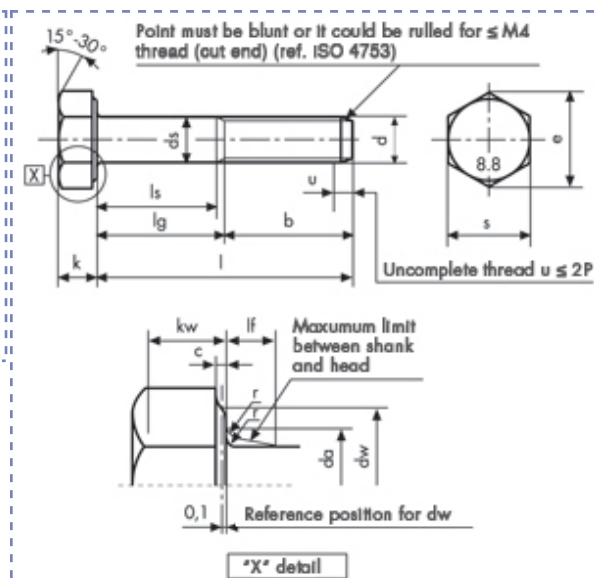

Hexagonal head screws
ISO 4014 - UNI 5737
DIN 931
partially threaded
Class 8.8 Zinc plated



Description	Price VATexcl. euro/100	% Price Change	Package	d mm	L mm
M 24 X 210 ZINCATE	1.005,00	+ 60%	1	M24	210

M 24 X 210 ZINCATE			da	max	26.4	k	nom	15
p	3		ds	max	24		min cat. A	14.785
				min cat. A	23.67		max cat. A	15.215
b	$l \leq 125$	54	dw	min	33.61	kw	min cat. A	10.35
	$125 < l \leq 200$	60						
	$l > 200$	73						
c	max	0.2	e	min cat. A	39.98	r	min	0.8
	min	0.8	lf	max	4			
							min cat. A	35.38