

Metallic screws and nuts

Per diametri M10, M12, M14, M22 la ISO 4014 prevede valori s, e, dw differenziati da UNI e DIN


Tolleranze: categoria A e B secondo disponibilità di magazzino

A richiesta: diametri >M30 - lunghezze >300

$lg_{max} = l - b$

$ls_{min} = lg_{max} - 5p$

A richiesta: in materiale AISI 304 - 316 - 410 - B7 - L7

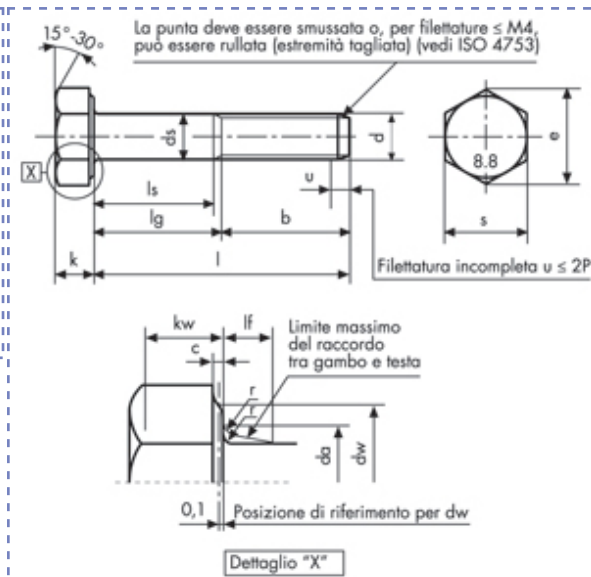

Hexagonal head screws
ISO 4014 - UNI 5737
DIN 931
gambo parzialm. filettato
Classe 8.8 Zincate



Description	Price VATexcl. euro/100	% Price Change 1	% Price Change 2	Package	d mm	L mm
M 18 X 65 ZINCATE	172,00	+ 60%	-	1	M18	65

M 18 X 65 ZINCATE			da	max	20.2	k	nom	11.5		
p	2.5		ds	max	18		min cat. A	11.285		
				min cat. A	17.73		max cat. A	11.715		
b	$l \leq 125$	42	dw	min	25.34	kw	min cat. A	7.9		
	$125 < l \leq 200$	48					r	min	0.6	
	$l > 200$	61						s	max	27
c	max	0.2	lf	max	3				min cat. A	26.67
	min	0.8								

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

GANDINI FASTENERS SRL viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution
of fasteners, fixing elements
and mechanical parts
machining

GANDINI FASTENERS SRL Sales department
viale Pier Paolo Pasolini, 83 250@gandini.it
Sesto San Giovanni Mi - Italy tel +39 02 241 047 250

Administration
350@gandini.it
tel +39 02 241 047 350