

## Metallic screws and nuts


- 1) A light rounding-off or a countersink between the head and the hexagonal socket is allowed.
- 2) The superior side of the head can be rounded or blunt as per manufacturer directives.
- 3) The inferior side of the head can be rounded or blunt to  $d_w$ , in both cases it will be without rags.

$$l_g \max = l - b$$

$$l_s \min = l_g \max - 5p$$

$$l_f \max = 1,7 r \max$$

$$r \max = d_a \max - d_s \max: 2$$

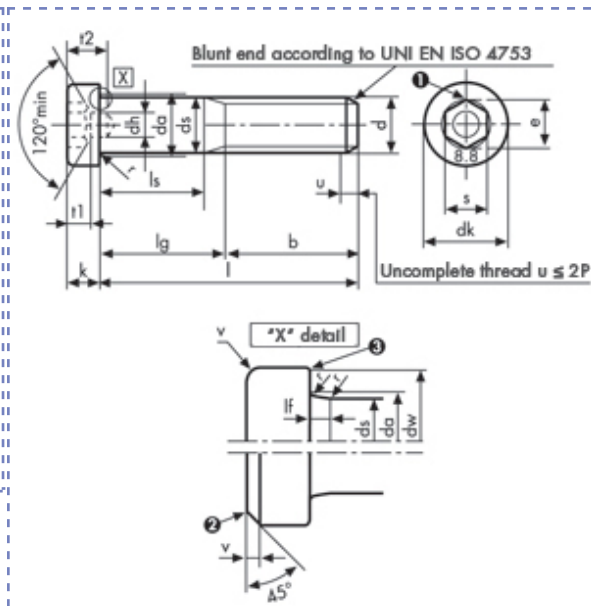

Hexagonal socket head  
cap screws  
low head with easier hole  
DIN 6912 Class 8.8



| Description | Price VAT excl.<br>euro/100 | % Price Change | Package | d mm | L mm |
|-------------|-----------------------------|----------------|---------|------|------|
| M 6 X 10    | on demand                   | 1<br>2         | -       | M6   | 10   |

|                    |                    |      |    |     |      |    |     |      |
|--------------------|--------------------|------|----|-----|------|----|-----|------|
| <b>M610-691288</b> |                    |      | dh | max | 3.06 | r  | min | 0.25 |
| p                  | 1                  |      |    | min | 3    |    | nom | 5    |
| b                  | $l \leq 125$       | 18   | ds | max | 6    | s  | max | 5.14 |
|                    | $125 < l \leq 200$ | -    |    | min | 5.82 |    | min | 5.02 |
|                    | $l > 200$          | -    | dw | min | 9.2  |    | nom | 2.5  |
| dk                 | max                | 10   | e  | min | 5.72 | t1 | max | 2.62 |
|                    | min                | 9.78 | lf | max | 0.68 |    | min | 2.38 |
| da                 | max                | 6.8  | k  | max | 4    | t2 | max | 5.3  |
|                    |                    |      |    | min | 3.82 |    | min | 5    |

Technical informations are indicative and can be updated.

Copyright Gandini Fasteners S.r.l. All rights reserved. No part of this web site may be reproduced in any form without express permission.

**GANDINI FASTENERS SRL** viale Pier Paolo Pasolini, 83 - 20099 Sesto S.Giovanni Milano Italy  
Tel. +39 02 241 047 250 Fax +39 02 241 047 74

Production and distribution  
of fasteners, fixing elements  
and mechanical parts  
machining

**GANDINI FASTENERS SRL** Sales department  
viale Pier Paolo Pasolini, 83 250@gandini.it  
Sesto San Giovanni Mi - Italy tel +39 02 241 047 250

**Administration**  
350@gandini.it  
tel +39 02 241 047 350